
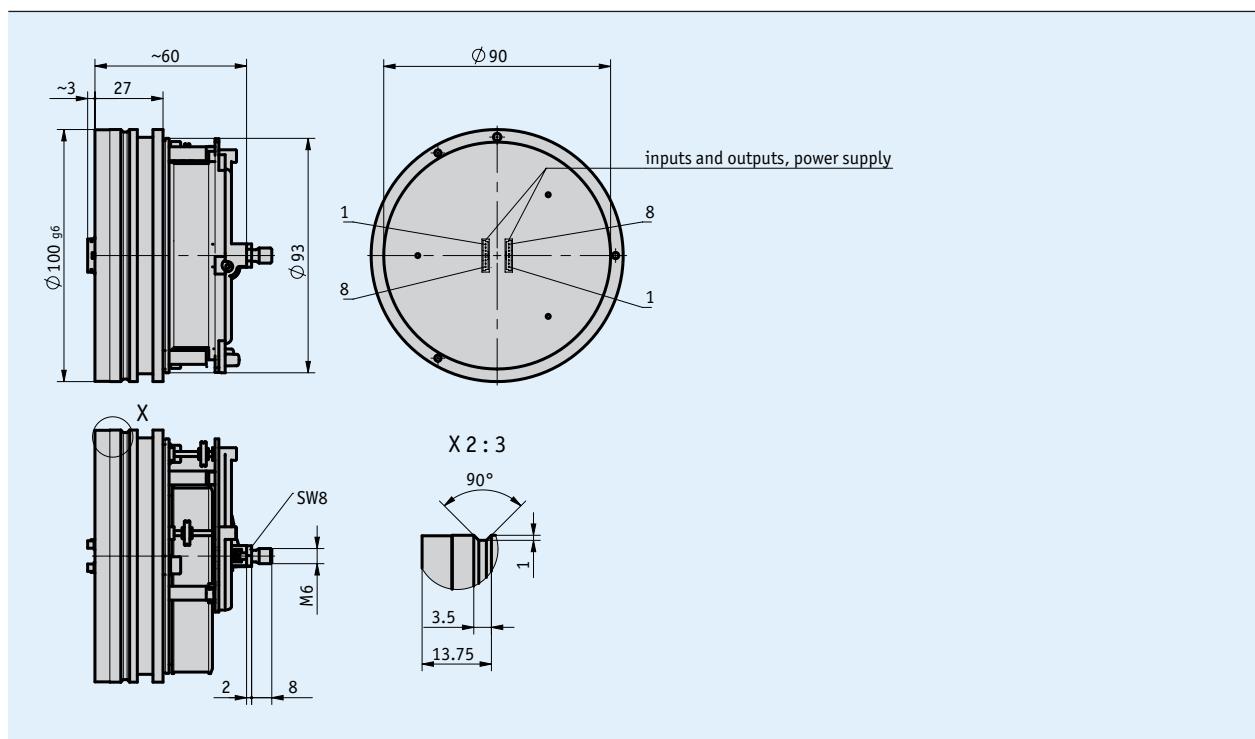


Profile

- Measuring range 0 ... 5000 mm (196.85 inches)
- Absolute measuring system
- Pressure-resistant up to 350 bar, pressure peaks up to 450 bar
- High degree of flexibility, adjustable to all measuring lengths thanks to teach-in
- Redundant interfaces (CAT3) available
- Safety version usable up to Performance Level d
- Analog, CANopen, SAE J1939, CANopen Safety interfaces

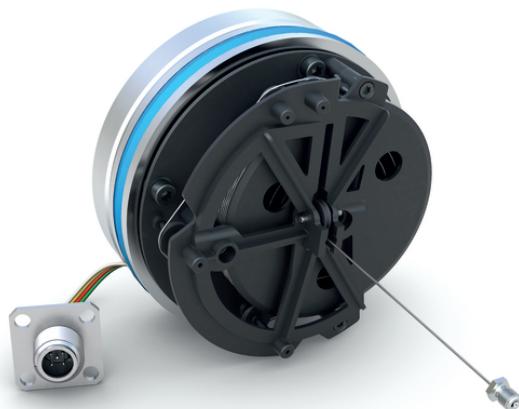

Mechanical data

Feature	Technical data	Additional information
Flange	aluminum	sealing ring (HNBR)
Housing	synthetic	PA66
Wire design	ø0.45 mm	steel rope (stainless)
Extension force	≥4 N	
Acceleration	≤24 m/s ²	

Electrical data

Analog interface

Feature	Technical data	Additional information
Operating voltage	9 ... 32 V DC	ambient condition MH, at output 0 ... 5 V, 0.5 ... 4.5 V, 0.25 ... 4.75 V, 1.0 ... 4.9 V, reverse polarity protected
	12 ... 32 V DC	ambient condition MH, at output 0 ... 10 V, reverse polarity protected
	12 ... 32 V DC	ambient condition MH, at output 0 ... 20 mA, 4 ... 20 mA, but UB > Uload +2.0 V, reverse-polarity protected
	24 V DC ±20%	ambient condition CE, reverse polarity protected
Current consumption	<40 mA	at 24 V DC, per encoder
	<80 mA	at 12 V DC, per encoder
Power input	<1 W	without load, per encoder
Digital inputs	4	Limit inputs (redundant)
	2	Limit inputs (not redundant)
Input signal level high	>8.4 V	
Input signal level low	<2.8 V	
Output voltage	0 ... 10 V	load current <10 mA
	0 ... 5 V	load current <10 mA
	0.5 ... 4.75 V	load current <10 mA
	0.25 ... 4.75 V	load current <10 mA
Output current	1 ... 4.9 V	load current <10 mA
	0 ... 20 mA	load ≤500 Ω
	4 ... 20 mA	load ≤500 Ω
Linearity tolerance	±0.25 %	5000 mm measurement length
Cycle time	typisch 1.5 ms	
Starting time	<150 ms	
Type of connection	plug connection system	KV1H accessory

CANopen interface

Feature	Technical data	Additional information
Operating voltage	9 ... 32 V DC	ambient condition MH, reverse polarity protected
	24 V DC ±20%	ambient condition CE, reverse polarity protected
Current consumption	<40 mA	at 24 V DC, per encoder
	<60 mA	at 12 V DC, per encoder
Power input	<1 W	per encoder
Linearity tolerance	±0.25 %	5000 mm measurement length
Interface	according to ISO 11898, not electrically isolated	CANopen, CIA 406, CIA 301, CIA 305
Address	adjustable	per SDO or Layer Setting Service (LSS)
Baud rate	20 kBit/s	
	50 kBit/s	
	125 kBit/s	
	250 kBit/s	
	500 kBit/s	
	800 kBit/s	
	1 MBit/s	
Cycle time	typisch 1.5 ms	
Starting time	<150 ms	
Type of connection	plug connection system	KV1H accessory

■ CANopen Safety interface

Feature	Technical data	Additional information
Operating voltage	9 ... 32 V DC 24 V DC ±20 %	mobil hydraulics, reverse polarity protected industrial hydraulics, reverse polarity protected
Current consumption	<40 mA <80 mA	at 24 V DC, per encoder at 12 V DC, per encoder
Power input	<1 W	
Linearity tolerance	±0.25 %	5000 mm measuring length
Interface	ISO 11898, not electrically isolated	CANopen Safety (EN50325-5)
Address	adjustable	via SDO or Layer setting service (LSS)
Baud rate	20 kBit/s 50 kBit/s 125 kBit/s 250 kBit/s 500 kBit/s 800 kBit/s 1 MBit/s	
Cycle time	typisch 1.5 ms	
Settling time	<150 ms	
Type of connection	connector system	accessories KV1H

System data

Feature	Technical data	Additional information
Scanning	magnetic	
Resolution	12 Bit 0.1 mm	analog output CANopen, SAE J1939, CANopen Safety
Measuring range	0 ... 5000 mm	measuring range flexibly usable between 0 ... 5000 mm
Travel speed	≤2 m/s	
Failure rate	235.6 year(s) 253.3 year(s)	analog output, at 60 °C (MTBF) EN/IEC61709 (SN29500) CANopen, at 60 °C (MTBF) EN/IEC61709 (SN29500)

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 105 °C -30 ... 100 °C	electronics mechanics
Storage temperature	-40 ... 85 °C	
Relative humidity	100 %	condensation admissible in the mounted and plugged condition
Operating pressure	<350 bar	P ₀ based on ISO19879
Overload pressure	<450 bar	P _{max} based on ISO 19879
Test pressure	650 bar	P _{static} based on ISO 19879
EMC	EN 61326-1 ISO 11452-1,-2,-3,-4,-5 ISO 7637-1,-2 ISO / TR 10605	ambient condition CE, industry immunity requirement, class B emission limit ambient condition MH, interference EUB ambient condition MH, transient impulses ambient condition MH, electrostatic discharge (ESD)
Protection category	IP67 IP69K	EN 60529, built in cylinder (IP69K) with KV1H and suitable mating connector ISO 26053, built in cylinder (IP69K), with KV1H and suitable mating connector

Order

■ Ordering information

One or more system components are required:

Cable extension KV1H

www.siko-global.com

■ Ordering table

Feature	Ordering data	Specification	Additional information
Measuring range	... A	3000, 3500, 4000, 4500, 5000 in mm	
Ambient conditions	MH CE	B mobil hydraulics industrial hydraulics	
Interface	0/5V 0/10V 0.25/4.75V 0.5/4.5V 1.0/4.9V 0/20mA 4/20mA CAN CANs	C 0 ... 5 V 0 ... 10 V 0.25 ... 4.75 V 0.5 ... 4.5 V 1.0 ... 4.9 V 0 ... 20 mA 4 ... 20 mA CANopen CANopen Safety	
Redundancy	NR R	D not redundant redundant	

■ Order key

SGH50 - **A** - **GW6** - **B** - **C** - **D** - **M1** - **DS** - **S**

Scope of delivery: SGH50, Quick Start Guide

Accessories:

Programming Tool ProTool SGH

www.siko-global.com