


Magnetic band ring MBR320

Incremental, flexible magnetic band ring for self-assembly, pole length 3.2 mm

Profile

- With reference point as an option
- Easy mounting on self-made carrier

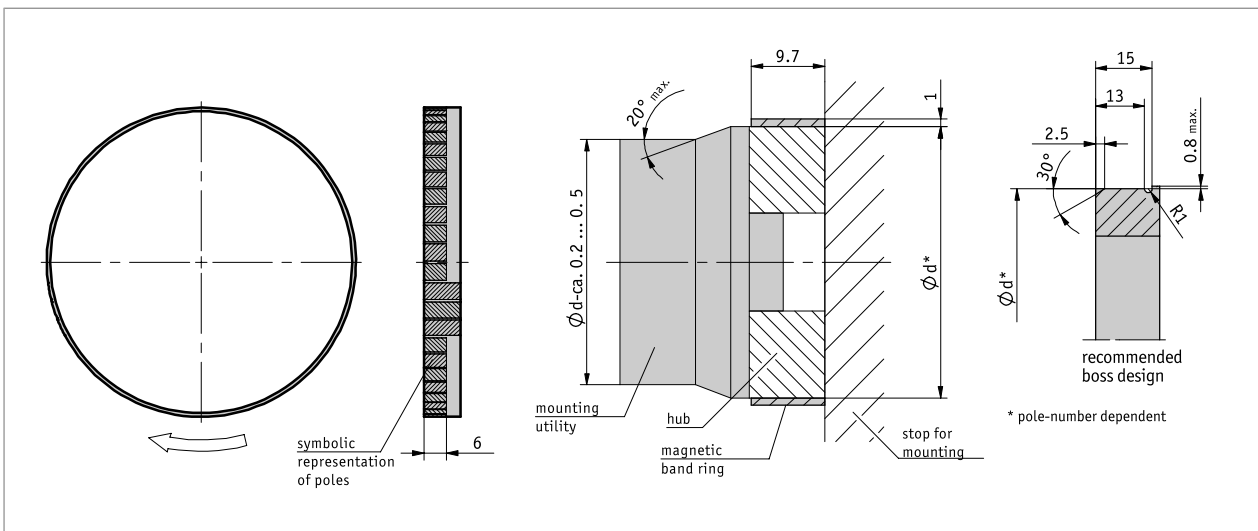

Mechanical data

Feature	Technical data	Additional information
Band width	9.7 mm	
Band thickness	1 mm	without cover strip or adhesive carrier tape
Mounting type	adhesive connection	recommended two-component adhesive: Uhu Plus 300 Endfest

■ Dimensions

Pole	36	50	100	150	180	250
Diameter d [mm]	35.7 ±0.03	49 ±0.03	100.9 ±0.03	151.8 ±0.03	182.4 ±0.03	253.7 ±0.03
Diameter with MBR320 [mm]	37.7 ±0.03	51 ±0.03	102.9 ±0.03	153.8 ±0.03	184.4 ±0.03	255.7 ±0.03
Circumference U with MBR320 [mm]	118.44	160.22	323.27	483.18	579.31	803.31
Speed [rpm]	≤12710	≤9370	≤4640	≤3100	≤2590	≤1860

System data

Feature	Technical data	Additional information
Pole length	3.2 mm	
Measuring range	360 °	

Magnetic band ring MBR320

Incremental, flexible magnetic band ring for self-assembly, pole length 3.2 mm

■ pulses/revolution

"Pole number"	36	50	100	150	180	250	
Scaling factor of sensor	20	720	1000	2000	3000	3600	5000
	16	576	800	1600	2400	2880	4000
	10	360	500	1000	1500	1800	2500
	8	288	400	800	1200	1440	2000
	5	180	250	500	750	900	1250
	4	144	200	400	600	720	1000
	1	36	50	100	150	180	250

Table applies to the combination MBR320 with MSK320

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-20 ... 70 °C	
Storage temperature	-20 ... 70 °C	
Relative humidity	100 %	condensation admissible

Order

■ Ordering table

Feature	Ordering data	Spezifikation	Additional information
"Pole number "	A 36	36 poles	
	50	50 poles	
	100	100 poles	
	150	150 poles	
	180	180 poles	
	250	250 poles	
		others on request	
reference point	B 0	without	
	M	with	

■ Order key



 **Scope of delivery:**
MBR320, Installation Instructions