


Profile

- analog position indicator
- Measured value acquisition based on the gravity principle
- High stability thanks to doubly supported pointer shaft
- Very robust, glass-fiber reinforced plastic housing
- Wide range of gear ratios
- Special scales, also for small numbers of pieces
- Dustproof, oil-filled or waterproof versions

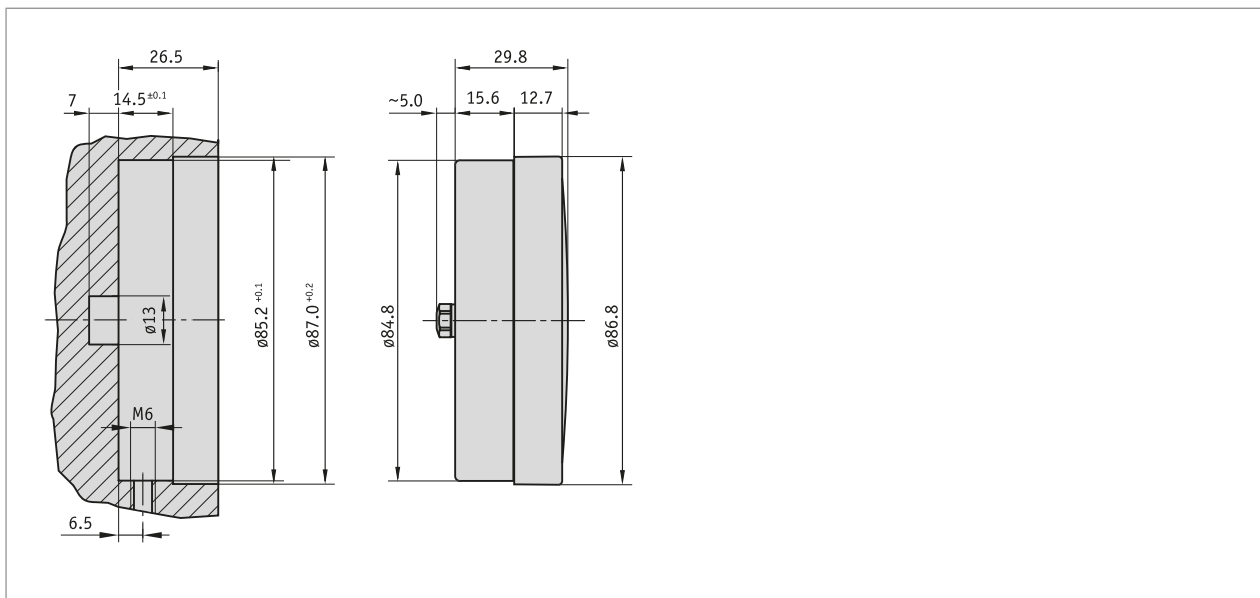

Mechanical data

Feature	Technical data	Additional information
Housing	reinforced plastic	
Weight	0.1 kg	N, W design
	0.2 kg	P design

Order

■ Ordering information

One or more system components are required:

Handwheel HG10	www.siko-global.com
Handwheel HK12	www.siko-global.com
Handwheel HK16	www.siko-global.com
Handwheel HS14	www.siko-global.com
Handwheel HST11	www.siko-global.com
Handwheel KHB13	www.siko-global.com
Handwheel KHB15	www.siko-global.com

■ Ordering table

Feature	Ordering data	Spezifikation	Additional information
version	A N	dust-proof	

Feature	Ordering data	Spezifikation	Additional information
	P W	oil-filled waterproof	
Gear ratio	B ...	1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100 others on request	
Sense of rotation	C i e	clockwise ascending values counter-clockwise ascending values	
Pointer	D 1 2	red with transmission red with transmission + black 1:1	
covering glass	E S A M	plastic synthetic material, acetone-resistant mineral glass	
zero position	F ON MN	without zero position with zero position	
scale	G N... VK...	normal scale special scale	related to the transformation ratio customer-specific, no VK for first production
multi-color scale	H C1 C2 C3	1-colored 2-colored 3-colored	

Order key

S80/1 - - - - - - - -

A B C D E F G H

 **Scope of delivery:**
S80/1